

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 913 498 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
06.05.1999 Bulletin 1999/18

(51) Int Cl.⁶: **C23C 18/16, C23C 18/30**

(21) Application number: **98308492.2**

(22) Date of filing: **16.10.1998**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **17.10.1997 GB 9722028**

(71) Applicant: **Shipley Company LLC**
Marlborough, MA 01752 (US)

(72) Inventors:
• **Goosey, Martin T.**
Nr Daventry NN11 6LG (GB)

- **Graves, John E.**
Nuneaton, Warwickshire CV11 6YT (GB)
- **Buch, Joachim**
Coventry CV3 2RQ (GB)
- **Poole, Mark A.**
Rugby, Warwickshire CV22 7EA (GB)
- **Hirst, Deborah**
Nuneaton, Warwickshire CV11 4FS (GB)
- **Holland, Rebecca**
Welford on Avon, Warwickshire CV37 8PS (GB)

(74) Representative: **Chapman, Paul William et al**
Kilburn & Strode,
20 Red Lion Street
London WC1R 4PJ (GB)

(54) Electroless plating processes

(57) The invention includes processes for combined polymer surface treatment and metal deposition. Processes of the invention include forming an aqueous solution containing a metal activator, such as an oxidized species of silver, cobalt, ruthenium, cerium, iron, manganese, nickel, rhodium, or vanadium. The activator can be suitably oxidized to a higher oxidation state electrochemically. Exposing a part to be plated (such as an organic resin, e.g. a printed circuit board substrate) to the solution enables reactive hydroxyl species (e.g. hydroxyl radicals) to be generated and to texture the polymer surface.

Such texturing facilitates good plated metal adhesion. As part of this contacting process sufficient time is allowed for both surface texturing to take place and for the oxidized metal activator to adsorb onto said part. The part is then contacted with a reducing agent capable of reducing the metal activator to a lower ionic form, or a lower oxidation state. That reduction can result in the formation of metallic catalytic material over the surface of the part. The reduced metal activator can then function to catalyze the electroless deposition of metal such as copper from solution by contacting the part with the plating solution.

EP 0 913 498 A1

Description

BACKGROUND

1. Field of the Invention

[0001] This invention relates to metallization processes and more particularly to electroless plating, including e.g., copper plating of certain polymers such as ABS (acrylonitrile butadiene styrene) copolymers, epoxy resins, and other organic polymers, including non carbon-fluorine bond polymers.

2. Background

[0002] Conventional methods employed for metallizing polymers (e.g. ABS) utilize aggressive oxidizing agents such as chromic acid as part of the surface treatment prior to conditioning, catalyzation and electroless metal deposition. This results in a lengthy process which often utilizes undesirable chemicals that are both unpleasant to handle, difficult to treat after use and which are becoming increasingly environmentally unacceptable.

SUMMARY OF THE INVENTION

[0003] We have now found processes that include a surface treatment providing a substrate morphology leading, after further steps, to direct catalyzation of the substrate surface without the need for the traditional subsequent neutralization, conditioning and tin/palladium catalyzation steps. This is a major improvement since it removes several process steps, one of which is the use of chromic acid. The invention also obviates the need to use an expensive palladium based plating catalyst. The new processes are, in part, based upon the use of electrochemically or otherwise generated metal ions (e.g. Ag^{2+} or Co^{3+}), referred to herein as metal activators. Suitable metal activators include silver, cobalt, ruthenium, cerium, iron, manganese, nickel, rhodium, and vanadium, with silver and cobalt being generally preferred.

[0004] In use, the metal activators are oxidized to a higher state (e.g. to Ag (II) or to Co (III)), preferably electrochemically. Without being bound by theory, it is believed the oxidized metal activator generates reactive hydroxyl species from water, such as hydroxyl radicals. These hydroxyl species are very reactive and attack polymer surfaces, particularly organic polymers, to give an ideal pitted morphology deemed desirable for subsequent metal adhesion and which is similar to that provided by chromic acid. In this process, following surface texturing the substrate is immersed in a reducing agent pre-dip solution and it can then be plated immediately by immersion in an electroless metal plating solution, e.g., copper bath without any further process steps. A further advantage of the invention is that the metal activator treatment solution (e.g. silver or cobalt solution) may be regenerated such as by electrochemical methods thus reducing problems encountered with waste treatment.

[0005] The present invention provides improved methods of plating polymers with metal e.g., copper, silver, nickel, gold, tin, cobalt etc. for subsequent use in other applications where molded plastic parts are used, e.g. to produce decorative parts such as in perfume bottle tops and in decorative automobile parts, and for electromagnetic interference (EMI) shielding applications. The invention is also useful to plate parts to produce molded electrical interconnect devices.

[0006] The present invention also is particularly useful in the manufacture of printed circuit boards. For example oxidizing agents such as potassium permanganate are used to remove resin smear and to provide a textured polymer prior to conditioning, catalysation and electroless metal deposition. The use of transition oxidized metal species (e.g. Ag^{2+} or Co^{3+}) in the production process removes several process steps and reduces chemical consumption.

[0007] As used herein, the term "metal activator" refers to a metal that is sufficiently water soluble to function in the processes of the invention and can be oxidized to a higher state to generate reactive hydroxyl species (e.g. hydroxide radicals) from water and promote electrodes plating in accordance with the processes of the invention. Thus, suitable metal activators can be identified by simple testing, e.g. by testing a particular metal by the general procedure of Example 1 which follows to determine if electroless deposition is provided. In any event, as mentioned above, suitable metal activators include silver, cobalt, ruthenium, cerium, iron, manganese, nickel, rhodium, and vanadium, with silver and cobalt being generally preferred.

[0008] Other aspects of the invention are disclosed infra.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] FIG. 1 illustrates diagrammatically a preferred process of the invention.

[0010] FIG. 2 shows a preferred additive process of the invention.

[0011] FIG. 3 shows a preferred pattern plate process of the invention.

DETAILED DESCRIPTION OF THE INVENTION

5 [0012] According to the first aspect of the invention, a process is provided for metallizing a part, particularly a polymer substrate such as ABS, which has been etched by a reactive hydroxyl species (e.g. hydroxyl radicals) generated from water as a result of the presence a metal activator (e.g. Ag^{2+} , Co^{3+}) in the water, and applying a reducing agent capable of reducing the oxidized metal activator species to a lower oxidation state (e.g. a zero oxidation state, or Ag^{2+} to Ag^0 , or Co^{3+} to Co^{2+}). Any of a wide variety of reducing agents may be employed, e.g., a boron reagent such as a boron
10 hydride or salts thereof e.g. sodium borohydride, and other boranes such as dimethylaminoborane; and other agents such as sodium dithionite, formaldehyde or a phosphite e.g., sodium hypophosphite, which is preferred. The oxidized metal activator species is typically generated electrochemically. After application of the reducing agent, electroless plating is employing, e.g., using electroless copper, nickel and the like to form a metal surface on the polymer substrate. In contrast to prior electroless a Pd/tin, palladium, platinum or other electroless catalyst need not be employed to deposit effectively an electroless metal layer. In addition to ABS, other preferred polymers for metallization include e.
15 g. polyamide, polycarbonate, ABS/polycarbonate blends, epoxy laminates particularly as used in printed circuit board manufacture, polyetherimides and liquid crystal polymers.

[0013] As another aspect of this invention, methods are provided for plating electroless metal such as electroless copper on a part, particularly a polymer substrate such as ABS, which comprises forming a metal layer on ABS having
20 silver, cobalt or other metal activator thereon.

[0014] As yet a further aspect of this invention there is disclosed the use of electrochemically generated metal activator ions or oxidized species, such as silver $^{2+}$ ions, Co^{3+} , cerium (III) or (IV), iron (II) or (III), manganese (IV) or higher, nickel (II) (II) or (IV), ruthenium (V) (VI) (VII) (VIII), vanadium (IV) or (V), etc. in a combined surface treatment and metallization process where e.g. the silver ions generate hydroxyl radicals capable of texturing the polymer surface
25 and which can also be reduced to silver metal on the surface so that the silver metal catalyses the subsequent electrodes metal to be deposited thereon from a bath thereof, e.g. copper.

[0015] In order to achieve good quality metal deposits on polymers such as ABS, their surfaces are normally textured using aggressive solutions that provide a chemically and physically modified surface that is optimized for subsequent conditioning and electroless plating processes. Such materials that have been employed typically are strong oxidizing
30 agents such as the alkali permanganates used with thermosets such as epoxides and chromic acid as used with thermoplastics such as Acrylonitrile Butadiene Styrene (ABS). The aim is to produce a reticulated textured surface that not only is amenable to conditioning with a subsequent surfactant but which also provides good keying and mechanical adhesion of the subsequently deposited electroless copper or other metal.

[0016] In the case of prior use of ABS and chromic acid, the acid preferentially attacks ABS butadiene groups leaving a surface optimized for subsequent plating. Unfortunately, chromic acid may be a carcinogen and also presents various waste treatment, disposal problems and environmental concerns. Accordingly, there is great interest therefore in the development of alternative methods of metallization that do not utilize chromic acid. The present invention provides
35 such methods.

[0017] Oxidized metal activator species preferably are generated electrochemically using an undivided or divided cell containing the metal activator typically in salt form, e.g. as a sulphate salt in aqueous sulphuric acid solution, a nitrate salt in aqueous nitric acid solution, a fluoroborate salt in aqueous fluoroboric acid solution, a perchlorate salt in aqueous perchloric acid solution, a fluoride salt in aqueous hydrofluoric acid solution, a chloride salt in aqueous hydrochloric acid solution, a bromide salt in aqueous hydrobromic acid solution, a phosphate salt in aqueous phosphoric acid solution, a nitrate salt dissolved in either trifluoromethane sulphononic acid or trifluoroacetic acid aqueous solution,
45 etc., or from a mixture of the above mentioned salts and acids. Specifically preferred metal salts/acid combinations include silver nitrate/nitric acid; silver perchlorate/perchloric acid; silver sulphate/sulphuric acid; silver phosphate/phosphoric acid; silver nitrate/trifluoromethane sulphononic acid; silver nitrate/trifluoroacetic acid; cobalt sulphate/sulphuric acid; and the like. Other suitable cobalt salts and acid combinations include halides, sulphates, nitrates and tetrafluoroborates dissolved in sulphuric, nitric, tetrafluoroboric or phosphoric acid, or any combination thereof. Ruthenium (IV) oxide and sodium metavanadate also may be employed dissolved in any mixture of the above mentioned acids. Other suitable metal activator salts include cerium (III) sulphate, iron (II) sulphate, manganese (II) sulphate, nickel (II) sulphate, dissolved in any of the above acids.
50

[0018] Additionally, a mixture of different metal activators may be used in a single process.

[0019] Using an inert electrode such as platinum, platinized titanium, platinum on niobium or tantalum, ruthenium or iridium dioxide on titanium, or carbon (glassy or vitreous) and a current density of 1 mA/cm 2 to 10 A/cm 2 with 500mA/cm 2 being preferred for ABS, the oxidized metal activator species (e.g. Ag^{2+} or Co^{3+}) form rapidly and can readily attack polymers such as ABS giving a nicely texture surface virtually identical to that produced with chromic acid. Subsequent processing with a reducing agent and electroless metal plating solution e.g., copper plating gives electro-
55

less copper deposits with adhesion values equal to or better than those from substrates metallized following conventional chromic acid treatment. Oxidized cobalt species can be generated without a divided electrochemical cell, providing further cost reductions and easier processing.

[0020] The oxidized metal activator species can be generated by methods other than electrochemical reaction. For example, silver²⁺ ions can be generated chemically from solutions of silver¹ ions by oxidation with strong oxidizing agents such as ozone or by dissolution of silver (II) oxide, silver (II) fluoride or silver (II) fluorosulphate in acid. Other oxidized metal activators also can be generated chemically, rather than electrochemically. However, for ease of processing, electrochemical regeneration is generally preferred.

[0021] Regardless of how the oxidized metal activator species or ions are generated, it is desirable to use the oxidized species in the form of an aqueous solution where the oxidized species are present in a concentration of from 0.01 moles to 2.0 moles and preferably, in a concentration of from 0.1 to 1 mole per liter of treatment solution. The actual preferred concentration is dependent upon the substrate to be treated, which concentration can be readily determined empirically based on the present disclosure. The higher concentrations are generally more active. ABS is readily etched and a lower concentration solution of the metal activator ions in solution would be used to treat ABS than, for example, epoxy where a higher concentration of the oxidized activator in solution would be required.

[0022] As discussed above, if the part to be plated, e.g. a polymer part such as an ABS part, is treated with the metal activator and subsequent by immersed in a solution of a reducing agent such as a phosphite such as sodium hypophosphite; or a thionite such as sodium dithionite; or formaldehyde; or a hydride such as sodium borohydride; or a borane such as dimethylaminoborane (DMAB), the reduced metal activator (e.g. silver, cobalt, etc.) remains and the ABS or other part can be immediately plated with electroless metal e.g., copper without any further conditioning or catalyzation steps. The reducing solution contains sufficient reducing agent to reduce at least a portion of the oxidized metal activator. For this reason, the concentration of the reducing agent is dependent upon its ability to reduce the oxidized metal activator. Strong reducing agents may be used in lower concentration. Typically, the reducing agent is present in a molar ratio of from 0.1 to 2.5 times the concentration of the metal activator and preferably, in a ratio of from 0.2 to 1.2 times the concentration of the metal activator.

[0023] It is an important aspect of the invention that the oxidized metal activator, such as Ag²⁺, Co³⁺, cerium (IV), iron (III), manganese (IV), nickel (III), ruthenium (V), rhodium (IV), metavanadate, etc. species, may be continuously regenerated. Therefore, the total loss of metal coupled is small offsetting the cost of the relatively expensive metal couple salts. By continuous regeneration, though some metal loss will occur due to dray-out and uncharacterized side reactions, the overall loss is minimal. Regeneration may be easily conducted, e.g. by subjecting the solution after exposure to a part to be plated to further electrochemical treatment to regenerate higher oxidation state metal species. Even more preferably, regeneration is continually conducted during exposure of parts to provide a more or less steady state of oxidized metal activator species.

[0024] As a preferred embodiment of this invention oxidized metal activator species, which may be e.g. electrochemically generated Ag²⁺, Co²⁺ or Co³⁺ ions or species are employed in a combined surface treatment and metallization process where the oxidized metal activator species ions generate reactive hydroxyl species (e.g. hydroxyl radicals) capable of texturizing the polymer surface and which can also be reduced to a lower oxidation state metal activator (e.g. silver metal or cobalt metal) on the surface so that the reduced metal catalyzes the subsequent electroless metal to be deposited thereon from a bath thereof, e.g., copper, nickel, etc.

[0025] Silver ions normally exist in solution as the single charged Ag⁺ ion, as is typically found for example in solutions of silver (I) nitrate, silver (I) tetrafluoroborate, silver (I) perchlorate and silver (I) fluoride. However, under certain conditions silver can be oxidized further to the doubly charged Ag²⁺ ion or species. This ion is very reactive and can be used to attack virtually all organic materials including polymers. The Ag²⁺ ion in solution is not stable and through a series of reactions converts back to Ag⁺, typically over a period of a few days. However, the reversion of Ag²⁺ to Ag⁺ leads to the generation of hydroxyl radicals and it is this species that is so aggressive towards organic chemical bonds.

[0026] The major reaction steps resulting in the surface treatment are not fully understood but are generally described by the following mechanism where PolyH and Poly OH represent the untreated and treated polymer surfaces, respectively.

At the anode	$2\text{Ag}^+ \rightarrow 2\text{Ag}^{2+} + 2\text{e}^-$
At the polymer surface	$2\text{Ag}^{2+} + \text{PolyH} + 3\text{H}_2\text{O} \rightarrow 2\text{Ag}^+ + \text{Poly OH} + 2\text{H}_3\text{O}^+$
At the cathode	$2\text{H}_3\text{O}^+ + 2\text{e}^- \rightarrow \text{H}_2 + 2\text{H}_2\text{O}$
Overall	$\text{PolyH} + \text{H}_2\text{O} \rightarrow \text{Poly OH} + \text{H}_2$

[0027] The room temperature process requires only the consumption of electricity and water, and the only by-product is hydrogen. The latter point represents a significant improvement over the other "wet" treatments which require the disposal of toxic materials. Furthermore, any organic or biological matter present is oxidized to produce carbon dioxide

and water. The mechanism outlined above clearly should not be considered as being definitive: in particular, it is quite likely that further oxidation takes place, possibly involving the formation of carbonyl surface groups.

[0028] The temperature of various solutions used in the processes of the invention may suitably vary through a wide range. Some preferred temperatures are set forth in the examples which follow. For instance, a plastic such as an ABS or epoxy substrate, may be first treated with a conditioner solution that is above room temperature, e.g. from about 30 to 50°C, more preferably about 35 to 45°C. The part then may be treated with the oxidized metal activator solution that also is preferably above room temperature, e.g. from about 30 to 80°C, more preferably about 40 to 50 or 60°C. The part is then exposed to a reducing agent, which again preferably is at a temperature above room temperature, e.g. from about 25 to 50°C, more preferably about 28 to 35°C. Electroless plating may be conducted at electaed temperature at is known, e.g. from about 40 to 50°C.

[0029] Parts may be exposed to such treatment solutions by immersion, although spray applications also could be employed, at least for some treatments.

[0030] The copper deposits formed using processes of the invention have excellent appearance and adhesion. The processes of the invention can replace several steps in the conventional chronic acid based process and in particular it removes the need for an expensive tin/palladium catalyst stage. Although without desiring to be bound to the theory as to what is occurring as a result of using the reducing agent, it is believed that the reducing agent acts to reduce residual metal activator (e.g. silver ions) on the polymer substrate to ground state metal (e.g. silver metal) which is then able to catalyze the electroless copper reaction.

[0031] After application of the electroless copper to the polymer substrate, the copper may then be electroplated using conventional technology if desired. It has also been found as another aspect of the invention that applying a solvent swelling system on the subsbrate prior to etching as taught herein improves the adhesion of the metal to the polymer substrate. For example, solvents such as propylene carbonate, butyrolactone or combinations thereof or methyl ethyl ketone are representative of solvent swelling agents which soften and then swell the polymer surface. A Shipley conditioner product known as PM-920 is useful for this purpose. Also see U.S. Patent No. 5,178,956 regaining conditioners used prior to etching using etchants other than those described herein.

[0032] Commercially available electroless plating compositions can be employed in the processes of the invention. For example, the Shipley Company (Marlborough, MA, USA) has suitable solutions. Shipley's C3000 Electroless Copper is a preferred plating solution. Suitable electroless plating solutions and the use thereof also are widely described in the literature. See, for example, Coombs, *Printed Circuits Handbook*, (3rd Edition, McGraw Hill), which is incorporated herein in its entirety. See also U.S. Patent 4,515,829 to Deckert et al., incorporated herein by reference. See also Shipley's U.S. Patent 4,539,044; 3,765,936; and 3,661,597, all incorporated herein by reference.

[0033] Silver²⁺ (II) was used to treat waste matter (See EP 2 977 738 and U.S. Patent Nos. 4,874,485 and 4,925,643). Also see the paper (3 pages) provided at Science Open Meeting in London, U.K. on May 7, 1997 entitled "New Pre-treatments for Polymers", D.M. Brewis, R.H. Dahm and I. Matheson, for the use of silver II and the generation thereof and the one page paper provided at the 1996 Swiss Bonding Meeting entitled, "A New General Method for the Pre-treatment of Polymers".

[0034] Referring now to the Drawings, FIG. 1 diagrammatically illustrates the etching of the plastic substrate. In FIG. 1, there is shown a container 10 which is divided by a cation exchange membrane 11, e.g., DUPONT NAFION-fluoro polymer cation exchange membrane. At 12, there is shown a platinised-titanium mesh electrode (cathode) coupled to the negative terminal of a direct current (d.c.) source. An anode 13 of platinised-titanium mesh electrode is connected to the positive terminal +Ve of the d.c. source.

[0035] Between the membrane and the anode 13 there is positioned the plastic substrate, e.g., ABS in the shape of a plaque which is to be etched and which is attached to a holder 14A for moving it into and out of the liquid bath 15.

[0036] Agitation is provided by a magnetic stirrer (not shown).

[0037] FIG. 2 diagrammatically illustrates a preferred additive process of the invention to plate a printed circuit board, including the through holes. In Step 1 of that process, a printed circuit board substrate 10 having through holes 12 is provided. That substrate 10 may be a laminate material formed from ABS, polyamide, polycarbonate, polyetherimides, expoxies, etc., and blends thereof. In Step 2, the surface of substrate 10 is exposed to an oxidized metal activator, e.g., oxidized silver, cobalt or the like wherein the oxidized species may have been suitably generated electrochemically, as described above with respect to FIG.1. In that Step 2, the substrate 10 is then exposed to a reducing agent, e.g. a borane, preferably to leave a metal 14 (e.g. Ag if oxidized Ag used as the metal activator) on the substrate. In Step 3, a photoresist 16 then is applied to the planar surfaces and exposed and developed to provide desired bared substrate areas 18. The photoresist may be a dry film or applied as a liquid resist. In Step 4, the treated substrate 10 is immersed or other treated in an electroless plating solution to provide additive electrodes metal layers 20, which typically will be electroless copper layer. In Step 5, photoresist 16 is stripped using suitable materials, e.g. a commercial resist stripper solution, which often will be an alkali solution. In Step 6, an etch may be employed if desired to remove any reduced metal activator 14 on the non-plated surfaces of substrate 10.

[0038] FIG. 3 diagrammatically illustrates a preferred pattern plate process of the invention to plate a printed circuit

board, including through holes thereof. Steps 1 and 2 are the same as described above with respect to FIG. 2. Thus, in Step 1 of the process of FIG. 3, a printed circuit board substrate 40 having through holes 42 is provided. That substrate 40 again may be a laminate material formed from ABS, polyamide, polycarbonate, polyetherimides, epoxy resin, etc., and blends thereof. In Step 2, the surface of substrate 40 is exposed an oxidized metal activator, e.g., oxidized silver, cobalt or the like wherein the oxidized species may have been suitably generated electrochemically, as described above with respect to FIG. 1. In that Step 2, the substrate 40 is then exposed to a reducing agent, e.g. a borane, preferably to leave a metal 44 (e.g. Ag if oxidized Ag used as the metal activator) on the substrate. In Step 3, the treated substrate 40 is immersed or other treated in an electroless plating solution to provide an electroless metal layer 46, which typically will be an electroless copper layer. In Step 4, a photoresist 48 then is applied to the planar substrate surfaces and exposed and developed to provide desired bared electrolessly plated substrate areas 50. The photoresist may be a dry film or applied as a liquid resist. In Step 5, the treated substrate 10 is electroplated, e.g. with copper or other metal to provide electrolytic metal layers 52. In Step 6, photoresist 48 is stripped using suitable materials, e.g. a commercial resist stripper solution, which may be an alkali solution. In Step 7, an etch may be employed to remove exposed electroless layer 46.

[0039] The following non-limiting examples are illustrative of the invention. The preferred process for metallizing plastics such as ABS, epoxy laminates and the like include the following steps showing ingredient, amounts, temperature conditions and time (expressed as minutes or MINS).

EXAMPLE 1- Metallization of ABS			
PROCESS STEPS	MAKE UP	TEMPS/°C	TIME-MINS
1. Apply PM 920 Conditioner ¹ to ABS substrate	180 - 250 ml/l	38	1
Rinse (cold water)			2
2. Ag ²⁺ Etch	4M/l HNO ₃ + 1 M/l AgNO ₃ i=0.5 A/cm ²	50	14
Rinse (cold water)			2
3- Apply reducing agent Sodium borohydride	5 g/l	30	1
Rinse (cold water)			2
4. Plate with Cuposit 251 Electroless Copper ¹		46	15
Rinse (cold water)		Room Temperature	90
5. Apply 10% H ₂ SO ₄ dip		Room Temperature	2
6. Electroplate with Electroposit 1200 Copper ¹		Room Temperature	90
Rinse (cold water)		Room Temperature	
7. Bake		70	60

1. Available from Shipley Company, L.L.C of Marlboro, Massachusetts, United States of America

EXAMPLE 2 - Metallization of ABS			
PROCESS STEPS		TEMP/°C	TIME/MINS
5	1. Apply PM920 Conditioner to ABS substrate	38	1
	Rinse (Cold Water)		2
10	2. Ag ²⁺ Etch (having a make-up the same as the Ag ²⁺ etch of Example 1 above)	50	14
	Rinse (Cold Water)		2
15	3. Apply 10 g/l Sodium Hypophosphite + 35 ml/l sodium hydroxide i=0.5A/cm ²	25	1
	Rinse (Cold Water)		2
	4. Plate with Cuposit 251 Electroless Copper	46	15
20	Rinse (Cold Water)		2
	5. Apply 10% H ₂ SO ₄ dip	Room Temperature	1
25	6. Electroplate with Electroposit 1200 Copper	Room Temperature	90
	Rinse (Cold Water)		2
30	7. Bake	70	60

EXAMPLE 3 - Metallization of FR4 Epoxy Circuit Board Substrate			
PROCESS STEPS	MAKE UP	TEMP/ °C	TIME-MINS
1. Apply Circuposit Hole prep	200 ml/l	75	20
4125 (Shipley) to FR4 epoxy			2
Rinse (cold water)			
2. Ag ²⁺ Etch	4M/l HNO ₃ +0.5M/l AgNO ₃ i=0.39 A/cm ²	25 or 50	30 or 15
Rinse (cold water)			2
3. Apply reducing agent Sodium borohydride	20g/l	25	1
Rinse (cold water)			2
4. Plate with Cuposit 251 Electroless Copper ¹		46	15
Rinse (cold water)			90

1. Available from Shipley Company, L.L.C. of Marlboro, Massachusetts, United States of America

EXAMPLE 4 - Metallization of Photoimageable Dielectric

5

10

15

20

25

30

35

PROCESS STEPS	MAKE UP	TEMP/ C°	TIME-MINS
1. Apply Circuposit Hole prep 4125 to CIBA epoxy-based dielectric layer	200 ml/l	75	20
Rinse (cold water)			2
2. Ag ²⁺ Etch	4M/l HBF ₄ + 1 M/l AgBF ₄ i=0.5 A/cm ²	50	20
Rinse (cold water)			2
3. Apply reducing agent Sodium Hypophosphite + 35 ml/l Cuposit Z (Shipley)	20g/l	25	1
Rinse (cold water)			2
4. Plate with Cuposit 251 Electroless Copper ¹		46	15
Rinse (cold water)			2
5. Apply 10% H ₂ SO ₄ dip		RT	1
6. Electroplate with Electroposit 1200 Copper (Shipley)		RT	90
Rinse (cold water)			2
7. Bake		120	60

1. Available from Shipley Company, L.L.C. of Marlboro, Massachusetts, United States of America

EXAMPLE 5 - Metallization of ABS

40

45

50

55

Process Step	Make-up	Temperature(°C)	Time(mins)
PM920 conditioner ¹		38	1
1. Cold water rinse of ABS substrate			2
2. Apply 3302 conditioner ¹ to part		60	5
3. Cobalt etch	0.1 MCoSO ₄ /2.4 MH ₃ PO ₄	35	30
4. Cold water rinse			2
5. Reducing agent	DMAB 80 g/l	25	15
6. Cold water rinse			2

1. Available from Shipley Company, L.L.C. of Marlboro Massachusetts, United States of America

(continued)

EXAMPLE 5 - Metallization of ABS			
Process Step	Make-up	Temperature(°C)	Time(mins)
7. Copper bath	Shipley Circuposit 3361 ¹	52	30
8. Cold water rinse			2

1. Available from Shipley Company, L.L.C. of Marlboro Massachusetts, United States of America

[0040] It should be clear that the above process amounts, times, ingredients and etc. may be modified without departing from the invention.

[0041] It should also be understood that this process is applicable to polymers other than ABS with exception that in the case of using silver as the metal activator, polymers having carbon-fluorine bonds are preferred. The processes of the invention are useful for metallization of a wide variety of organic resin, including e.g. metallization of polyetherimides for use in metallization of molded electrical interconnect devices. The process also has application in the metallization of polymers for electromagnetic energy shielding.

[0042] The foregoing description of the invention is merely illustrative thereof, and it is understood that variations and modifications can be effected without departing from the spirit or scope of the invention as set forth in the following claims.

Claims

1. A process for metal deposition, said process comprising
 - providing an aqueous solution comprising a metal activator,
 - contacting a part to be plated with the aqueous solution of the metal activator for a time sufficient for the metal activator to adsorb onto the part,
 - contacting the part with a reducing agent capable of reducing the metal activator to a lower oxidation state, and metal plating the part by contact with a plating solution.
2. A process for electroless metal deposition of an organic resin part, comprising
 - etching the part with reactive hydroxyl species while catalyzing the part with an electroless metal plating catalyst, and
 - metal plating the part by contacting the part with an electroless metal plating solution.
3. The process of claim 2 the reactive hydroxyl species are generated by reaction with metal activator.
4. A process of claim 1 or 3 wherein metal activator is silver, cobalt, ruthenium, cerium, iron, manganese, nickel, rhodium, or vanadium.
5. A process of claim 1 or 3 wherein the metal activator is silver.
6. A process of claim 1 or 3 wherein the metal activator is cobalt.
7. A process of any one of claims 1 through 6 where the part to be plated is an organic plastic, preferably acrylonitrile butadiene styrene, polyamide, epoxy, polycarbonate, polyetherimide, or blends thereof.
8. A process of any one of claim 1 through 7 wherein the part to be plated is a printed circuit board substrate or an EMI substrate.
9. A process of any one of claims 1 through claim 8 where the metal activator is present in a concentration of from about 0.01 to 2.0 moles per liter of solution, preferably in a concentration of from about 0.1 to 1 mole per liter of solution.
10. A process of claim 1 where the reducing agent is selected from the group consisting of a phosphite, a hydride, a

borane, a borohydride, formaldehyde or a thionite.

11. A process of claim 1 where the plating solution is an electroless copper plating solution.

5 12. A process of any one of claims 1 or 3 through 11 wherein the metal activator is oxidized electrochemically and the solution containing the oxidized metal substrate is exposed to the part, and the metal activator is reduced.

10 13. The process of any of the preceding claims wherein a plating catalyst such as Pd/tin, Pd, or platinum separate from the metal activator is not employed and/or chromic acid or permanganate treatment of the part is not employed.

15

20

25

30

35

40

45

50

55

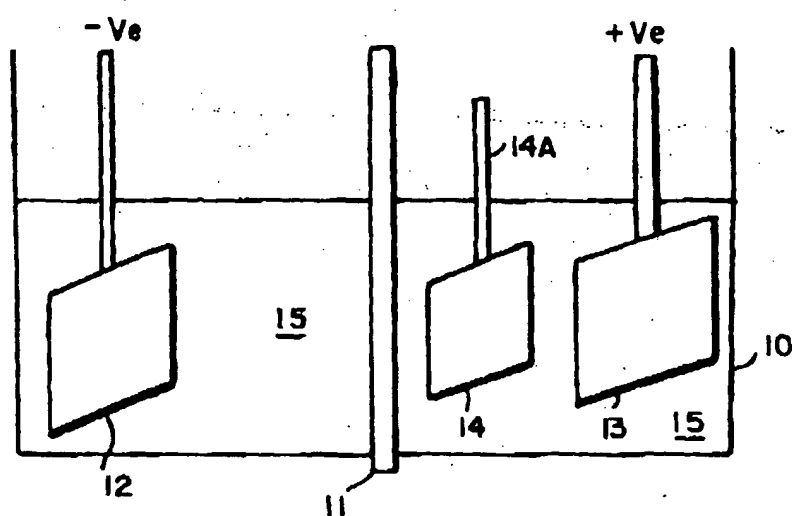


FIG. 1

FIG. 2

ADDITIVE PROCESS


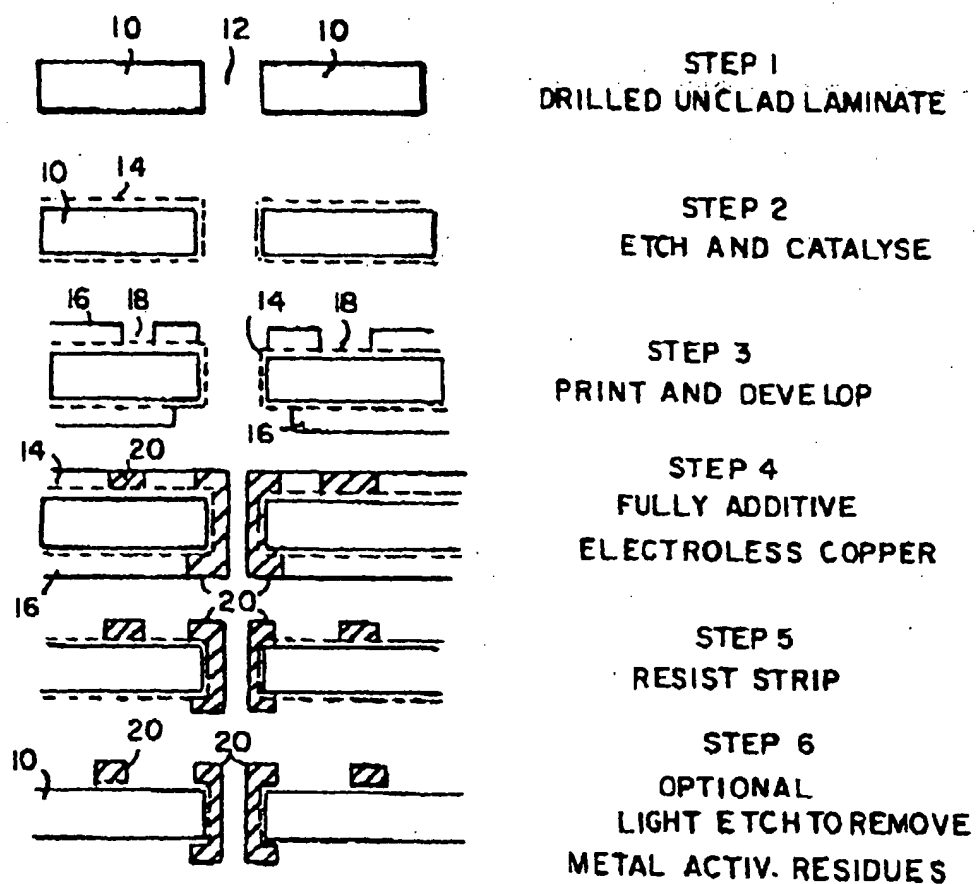


FIG. 3

PATTERN PLATE PROCESS




STEP 1

DRILLED UNCLAD LAMINATE




STEP 2

ETCH AND CATALYSE




STEP 3

ELECTROLESS COPPER

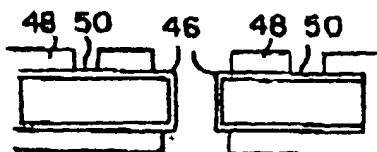


STEP 4

PRINT AND DEVELOP




STEP 5

ELECTROPLATE

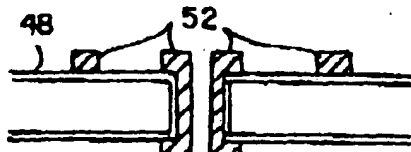

STEP 6

RESIST STRIP

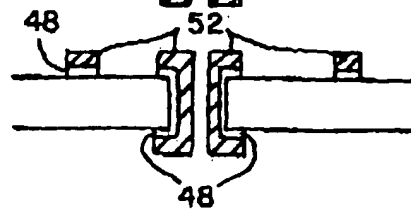

STEP 7

LIGHT
ETCH



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 98 30 8492

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X A	US 4 568 570 A (GIESECKE HENNING) 4 February 1986 * abstract * * column 1, line 5 - line 28 * * column 1, line 52 - column 2, line 7 * * column 2, line 26 - column 3, line 34 * * claims 1,2,8,9,11; example 2 * ---	1,4,5,7, 10,11,13 2	C23C18/16 C23C18/30
X A	US 4 734 299 A (MATUZAKI ISAO ET AL) 29 March 1988 * abstract * * column 1, line 7 - line 15 * * column 2, line 23 - column 3, line 4 * * claims 4,6; examples * ---	1,4,5,7, 8,10,11 2	
X Y	DE 12 64 921 B (SCHERING AG) 28 March 1968 * the whole document * ---	1,4,5,7, 10,11,13 2,3,9,12	
D,Y A	EP 0 297 738 A (ATOMIC ENERGY AUTHORITY UK) 4 January 1989 * abstract * * column 1, line 1 - line 53 * * column 2, line 11 - line 15 * * figure 1; examples 1,2 * ---	2,3,12 9	TECHNICAL FIELDS SEARCHED (Int.Cl.6) C23C
D,Y	BREWIS,BM;DAHME,RH;MATHIESON,I: "new general method of pretreating polymers" JOURNAL OF MATERIALS SCIENCE LETTERS, vol. 16, no. 2, 15 January 1997, pages 93-95, XP002093892 * the whole document * -----	2,3,9,12	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 18 February 1999	Examiner Ceulemans, J
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03/92 (Rev.01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 30 8492

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

18-02-1999

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4568570	A	04-02-1986	DE 3337856 A	25-04-1985
			CA 1232498 A	09-02-1988
			DE 3474165 A	27-10-1988
			EP 0142691 A	29-05-1985
			JP 60096766 A	30-05-1985

US 4734299	A	29-03-1988	JP 1844447 C	25-05-1994
			JP 61015982 A	24-01-1986
			JP 1730041 C	29-01-1993
			JP 4009874 B	21-02-1992
			JP 61015983 A	24-01-1986
			EP 0167326 A	08-01-1986

DE 1264921	B		NONE	

EP 0297738	A	04-01-1989	DE 3869490 A	30-04-1992
			JP 1030689 A	01-02-1989
			JP 2750123 B	13-05-1998
			US 4874485 A	17-10-1989
			US 4925643 A	15-05-1990

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82